



Vapor Absorption Chillers

- Steam Driven**
- Fuel(oil/gas) Driven
- Exhaust (DG/Gas engine/Gas Turbine) Driven
- Hot Water Driven
- Multi-Fuel Driven



Sustainable Solutions

From Cooling to Heating, from Power Generation to Air Purification, from Water and Sewage Treatment to Speciality Chemicals, THERMAX Solutions are improving life at work in many ways.

Every year THERMAX helps generate 6,000 MW of Power, produce 100,000 tons of steam, provide 1 million tons of Cooling and treat 1,000 million litres/day of Water and Waste.

THERMAX today is a major Engineering and Environment company with revenues of USD 800 million and with market capitalization of over USD 1 billion.

THERMAX was one of 20 Indian companies in Forbes list of "Asia's Best Under a Billion Companies" in 2005 and 2006 and was ranked "No. 1 among the top 21 wealth creators" in India over the last 5 years by a leading investment journal.

THERMAX brings to customers enriched experience of industrial applications, and expertise through technological partnerships and strategic alliances.

Operating from its Headquarters in Pune (Western India), Thermax has built an international sales & service network spread over South East Asia, Middle East, Africa, Russia, UK and the US. It has full fledged ISO 9001:2000 and ISO 14000 accredited manufacturing setups.

Vision

To be a globally respected high performance organization offering sustainable solutions in energy and environment.

Cooling & Heating Division - Cooling SBU


The Cooling SBU of THERMAX promotes Vapor Absorption Chillers as a cost effective and environment friendly alternative to electricity driven compression chillers.

It offers expert solutions in Process Chilling & Air Conditioning for industrial as well as commercial applications. Cooling SBU's strength lies in customized solution as per the requirement of the customers.

Unlike electrical chillers, Absorption Chillers are powered by heat. These machines can run on a variety of heat sources, e.g. steam, hot water, liquid/gaseous fuels, exhaust gases and/or a combination of above.

THERMAX - Conserving Energy, Preserving the Environment

Vapor Absorption Technology from THERMAX is at work for Clients in more than 50 industries including Pharmaceuticals, Chemicals, Fertilizers, Textiles, Petrochemicals, and Food & Beverages & Automobile industries as well as in Hotels, Commercial Complexes, Shopping Complexes, Office Buildings, Educational Institutes, Airports and Cinema halls.

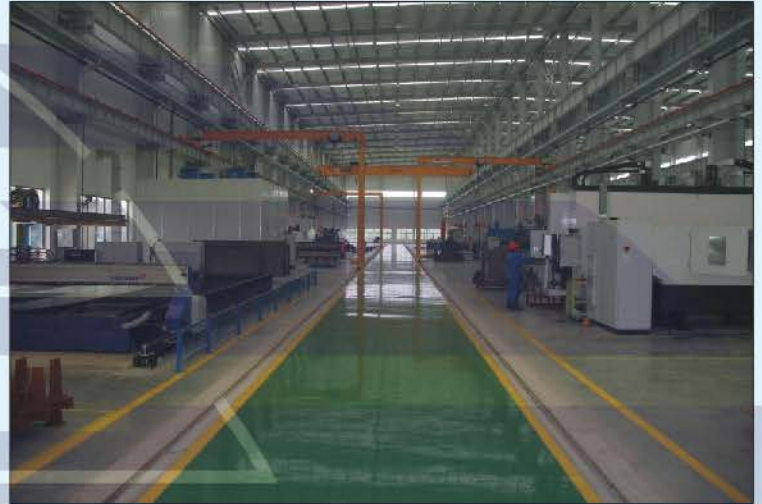

Manufacturing capabilities of THERMAX's Cooling SBU are confirmed by the fact that, over the years, THERMAX has installed numerous machines in more than 70 countries including USA, Germany, Spain, UK, Italy, UAE, Saudi Arabia, India, China, Australia, Thailand, Philippines & Malaysia, Russia, Nigeria with the products conforming to the respective country standards like ETL, CE, TUV, DNV, ASME etc. THERMAX has its fully owned subsidiaries namely Thermax Inc. in USA, Thermax Europe Limited in UK and Thermax (Zhejiang) Cooling and Heating Engg. Company Limited in China.

THERMAX believes in efficient and responsive services to its clients and exhibits in its way of business, by giving optimal and quality solutions and achieving customer delight. THERMAX has a worldwide sales, service and distribution network to fulfill the needs of its valuable customers.




2 State-of-the-art manufacturing facilities in India and China

TEST BAY


Thermax has a state-of-the-art test bay capable of testing various types of vapor absorption chiller – steam driven, hot water driven, fuel fired, exhaust driven and a combination of these up to a capacity of 3500 TR. The entire testing facility is centrally operated by sophisticated distributed control systems (ABB make) and can be operated by the touch of a button.

Steam	50 - 3500 TR
Exhaust	50 - 3500 TR
Hot Water	50 - 1150 TR
Fuel Fired	50 - 1300 TR

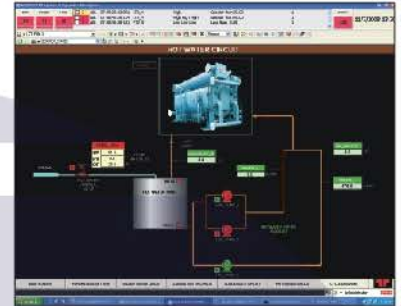

CUSTOMISED FEATURES (Optional)

- Online standby Canned Motor Pumps
- Multi-sectional Shipment Arrangements
- Remote Performance Monitoring Systems (RPMS)
- Auto Purging
- Side Stream Filtration

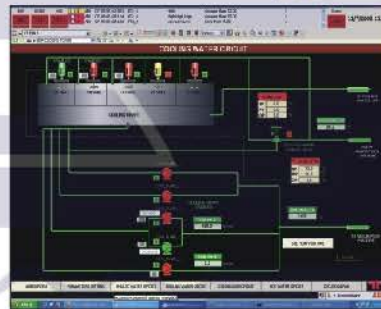


CUSTOMER CARE

THERMAX Absorption Cooling SBU has a wide network of Service Centres throughout the globe to ensure quick response to customers. With the cumulative service experience of about 4000 Vapor Absorption Chillers operating for more than 20 years, THERMAX service personnel are equipped to deliver the right solution to the users. THERMAX has developed specific service modules for different types of users depending on their usage pattern, conforming to our proactive approach.

For the benefit of its customers, THERMAX offers various value-added services like:

- Preventive maintenance contract
- Operation & manning
- Localized customer training programs

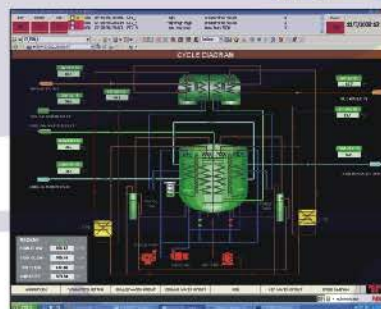

First prize in "Bry air awards" in 2006 and 2007 in "most innovative product design" category

SALIENT FEATURES

1.

Unique two stage evaporation technology ensuring the Lowest Specific Heat Input requirement resulting in lowest steam and water consumption. Two Stage evaporation gives 5 to 7 percent higher COP than conventional single stage evaporation technology.



Parameter for HTG	Unit	Para Flow	Advanced Series Flow
HTG temperature	°C	162	155
LiBr concentration	%	64-65	60.5



Parameter for LTG	Unit	Para Flow	Advanced Series Flow
LTG temperature	°C	88	90
LiBr concentration	%	62-64	63

2.

Advanced series flow cycle to avoid simultaneous occurrence of high temperature and high concentration, thereby minimizing the probability of corrosion.

3.

Unique state-of-the-art concentration control and display that virtually eliminates crystallization and is distinctly different from the auto decrystallization offered by other manufacturers. This permits the Vapor Absorption Chillers to run smoothly even at 10 C cooling water inlet temperature.

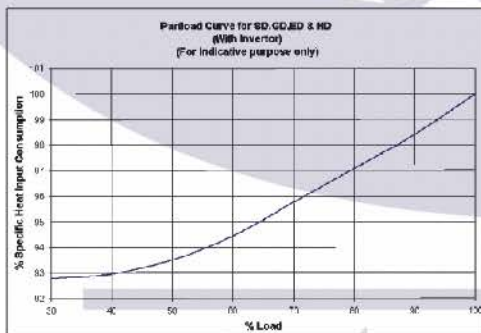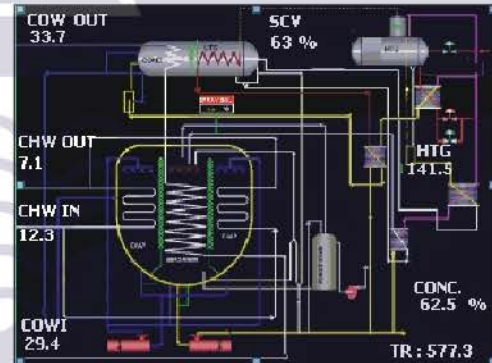

4.

Variable frequency control on absorbent pump for higher reliability & savings in Power, especially during part load operation.


5.

Double seal vacuum isolation valves and bolted pumps to facilitate machine mounted pump maintenance without any loss of vacuum in the system due to exposure to atmosphere.



6.

Chilled brine outlet temperature up to 0 °C. In applications where temperature of less than 4 °C is critical, vapour absorption technology can now be put to use.

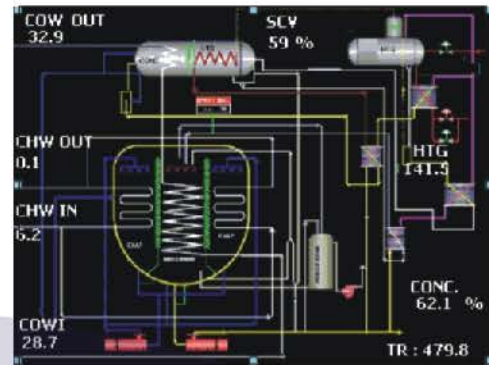

7.

PLC based control panel with display, user friendly interface and data logging system. Remote performance monitoring / DCS / BMS connectivity also possible.

8.

Process design that ensures maximum internal heat recovery to give the lowest specific heat input benefit to the customer.

- Enlargement of heat transfer area - Done by all manufacturers
- Two stage evaporation - Unique feature of Thermax Vapor Absorption Chillers
- Large temperature difference of chilled water - Thermax can offer ΔT as high as 30 C
- Refrigerant heat exchanger - Unique feature of Thermax Vapor Absorption Chillers
- Exhaust gas heat exchanger - Unique feature of Thermax Vapor Absorption Chillers



9.

Special tube metallurgy like Cupro Nickel, SS 316L, Titanium depending on water quality on site.

10.

Non-precipitating and non toxic Molybdenum based corrosion inhibitor that ensures smooth and stable performance.

11.

Multistage level control in three heat exchangers for effective operation during part load and to avoid solution pump cavitation.

TECHNICAL SPECIFICATIONS

Model Number	UNITS	SD 20A TCU	SD 20B TCU	SD 20C TCU	SD 20D TCU	SD 30A TCU	SD 30B TCU	SD 30C TCU	SD 40A TCU	SD 40B TCU	SD 40C TCU	SD 50A TCU	
Cooling Capacity	TR(KW)	132 (464)	157 (552)	198 (696)	236 (830)	285 (1002)	320 (1125)	376 (1322)	426 (1498)	481 (1692)	530 (1864)	583 (2050)	
Chilled Water Circuit	Flow Rate	m ³ /hr	72.4	86.1	108.6	129.5	156.3	175.5	206.2	233.7	263.8	319.8	
	No. of passes (Evaporator)	#	1+1										
	Friction loss	mWC(kPa)	1.4 (13.7)	1.7 (16.7)	4.0 (39.2)	4.9 (48.1)	4.1 (40.2)	4.5 (44.1)	7.1 (69.6)	6.4 (62.8)	6.5 (63.7)	6.9 (67.7)	6.9 (67.7)
	Connection Diameter	mmNB	125				150			200		200	
Cooling Water Circuit	Flow Rate	m ³ /hr	132	157	198	235	285	320	376	426	481	530	583
	Outlet Temp	°C	34.6	34.6	34.6	34.6	34.6	34.6	34.6	34.6	34.6	34.6	34.6
	No. of passes (absorber)	#	1+1						1,1				
	No. of passes (condensor)	#	1										
	Friction loss	mWC(kPa)	2.5 (24.5)	2.7 (26.5)	6.8 (66.7)	7.0 (68.6)	6.1 (59.8)	6.1 (59.8)	4.4 (43.1)	3.7 (36.3)	3.9 (38.2)	4.1 (40.2)	3.5 (34.3)
Connection Diameter	mmNB	150				200			250		300		
Steam Circuit	Steam Consumption	kg/hr	499	593	748	892	1077	1210	1421	1610	1818	2003	2204
	Connection Diameter(Steam)	mmNB	65				80			100		100	
	Connection Diameter(Drain)	mmNB	40				40			40		50	
Overall Dimensions	Length	mm	3070			4090		4390		5000		5050	
	Width	mm	2050			1940		2300		2360		2590	
	Height	mm	2700				2910			2860		3470	
Operating Weight	x 1000 kg	6.6	6.9	8.0	8.4	10.5	10.9	12.2	14.7	15.3	15.9	18.1	
Max. Shipping Weight	x 1000 kg	6.1	6.3	7.3	7.6	9.4	9.8	11.0	13.0	13.4	14.0	15.8	
Clearance for Tube Removal	mm	2500			3750		4100			4100		4300	
Electric Supply	Absorbent Pump Motor Rating	kW(A)	2.2(6)				3.0(8)			3.7(11)		5.5(14)	
	Refrigerant Pump Motor Rating	kW(A)	0.3(1.4)										
	Vacuum Pump Motor Rating	kW(A)	0.75(1.8)										
	Total Electric Input	kVA	7.6				9.1			11.2		13.4	
	Power Supply		415V(+10%), 50Hz(+5%), 3Phase+N										

Model Number	UNITS	SD 50B TCU	SD 60A TCU	SD 60B TCU	SD 60C TCU	SD 60D TCU	SD 70A TCU	SD 70B TCU	SD 80A TCU	SD 80B TCU	SD 80C TCU	SD 80D TCU		
Cooling Capacity	TR(KW)	644 (2265)	747 (2627)	829 (2916)	945 (3323)	1046 (3679)	1159 (4076)	1293 (4547)	1466 (5156)	1613 (5673)	1885 (6629)	2040 (7175)		
Chilled Water Circuit	Flow Rate	m ³ /hr	353.2	409.7	454.7	518.3	573.7	635.7	709.2	804.1	884.8	1034	1119	
	No. of passes (Evaporator)	#	1+1											
	Friction loss	mWC(kPa)	7.1 (69.6)	4.7 (46.1)	5.1 (50)	5.9 (57.9)	6.3 (61.8)	5.0 (49.0)	5.3 (52.0)	4.5 (44.1)	4.9 (48.1)	8.2 (80.4)	8.6 (84.3)	
	Connection Diameter	mmNB	200	250				300			350			
Cooling Water Circuit	Flow Rate	m ³ /hr	644	747	829	945	1046	1159	1293	1466	1613	1885	2040	
	Outlet Temp	°C	34.6	34.6	34.6	34.6	34.6	34.6	34.6	34.6	34.6	34.6	34.6	
	No. of passes (absorber)	#	1,1											
	No. of passes (condensor)	#	1											
	Friction loss	mWC(kPa)	3.7 (36.3)	5.4 (53.0)	5.5 (53.9)	6.2 (60.8)	6.5 (63.7)	5.8 (56.9)	6.2 (60.8)	5.6 (54.9)	5.9 (57.9)	7.9 (77.5)	8.3 (81.4)	
Connection Diameter	mmNB	300	350			400			450					
Steam Circuit	Steam Consumption	kg/hr	2434	2824	3134	3572	3954	4381	4888	5541	6097	7125	7711	
	Connection Diameter(steam)	mmNB	100	125				150			150			
	Connection Diameter(Drain)	mmNB	50	50				65			65			
Overall Dimensions	Length	mm	5050	6380			7840		8130		8340		9590	
	Width	mm	2590	2620			2860		3070		3560			
	Height	mm	3470	3570			3650		4210		4490			
Operating Weight	x 1000 kg	19.1	24.1	25.0	35.6	36.9	45.2	46.5	58.6	59.7	66.3	67.6		
Max. Shipping Weight	x 1000 kg	16.7	21.2	22.0	30.6	31.7	38.1	39.2	48.4	49.2	55.3	56.3		
Clearance for Tube Removal	mm	4300	5300			6560			7910					
Electric Supply	Absorbent Pump Motor Rating	kW(A)	5.5(14)	6.6(17)			7.5(20)			9.0(27)				
	Refrigerant Pump Motor Rating	kW(A)	0.3(1.4)				1.5(5)							
	Vacuum Pump Motor Rating	kW(A)	0.75(1.8)											
	Total Electric Input	kVA	13.4	15.5			18.1		20.3		25.3			
	Power Supply		415V(+10%), 50Hz(+5%), 3Phase+N											

Notes:

1. Model Nos. : SD XXX - TCU Steam fired Double effect Chillers
2. Chilled water inlet / outlet temperature = 12.2 / 6.7 °C
3. Cooling water inlet temperature = 29.4 °C
4. Steam at Control Valve Inlet is at 8 kg/cm²(g) (784.5 kPa(g)) pressure in dry saturated condition.
5. Minimum Cooling water inlet temperature is 10 °C
6. Ambient condition shall be between 5 to 45 °C
7. Maximum Allowable pressure in chilled / cooling water system = 8 kg/cm²(g) (784.5 kPa(g))
8. Maximum Allowable pressure in steam system = 10.5 kg/cm²(g) (1029.7 kPa(g))
9. Control panel Electric Input = 1kVA
10. All Water Nozzle connections to suit ASME B16.5 Class 150
11. Technical specification is based on JIS B 8622 : 2002
12. For super large chillers above 2040 TR (7175 KW), please contact Thermax representative.

More than 4000 installations with chilling capacity of over 1 million TR

INDUSTRIES SERVED



Hotels & Hospitality

Sheraton Towers, Brazil
P T Bali Nirwana, Indonesia
Marriot, USA

Commercial Centers

BBC Studio, UK
Henry Ford Museum, USA
Bicycle Casino, USA
33rd Precinct NYPD, USA



Educational Institutes

SUNY, Albany, USA
Monash University, Australia
Roosevelt Magnet School, USA

Super Market

Mundial Super Market, Brazil
Prezunic Super Market, Brazil
Raleys Dept. Stores, USA



Pharmaceuticals

Astrazeneca, UK
Pfizer India Ltd
Johnson & Johnson, USA
Boehringer, Germany

Medical Centers

Royal Free Hospital, UK
VA Medical Center, USA
Gemilli Hospital, Italy




Refineries & Petrochemicals

Exxon Mobil, Saudi Arabia
Saudi Formaldehyde & Chemicals, KSA
Reliance Industries Ltd., India
Gas Authority of India Ltd.

Chemicals

BASF, Mexico
Eka Chemicals, Brazil
Lyondell Equistar Chemicals, USA

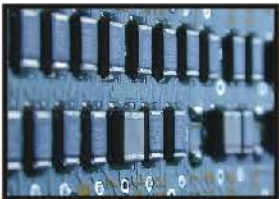

Electronics

Bosch, Germany
Moser Baer, India
Temic Heilbronn, Germany

Dairy & Confectionary

Nestle, Phillipines
Cadbury, Nigeria
Chitale Dairy, India



Engineering

Daimler Chrysler, Germany
Larsen & Toubro, India
SKF Bearings, India
Medway Plastics, USA

Steel

United Gulf Steel, U.A.E.
Bhilai Steel Plant, India
Rourkela Steel Plant, India



Applications in more than 50 industries for process and comfort cooling



THERMAX

MEET YOUR COOLING REQUIREMENTS FROM ANY HEAT SOURCE

Heat Source Thermax Chillers Applications

Steam

- from Process
- from Boiler

Hot Water

- from Process
- from Engine/DG


Liquid/Gaseous Fuels

- Natural Gas LPG
- FO
- SKD
- HSD etc

Exhaust Gas

- from Gas Engine/Turbine/DG

Combination of any two or more of above

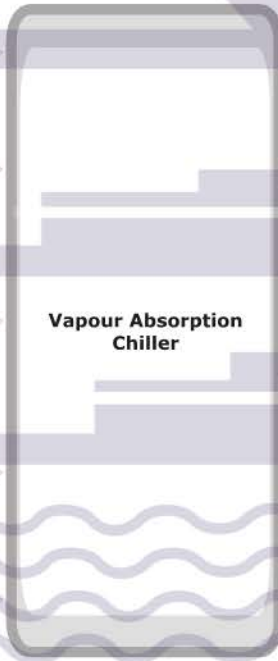

Thermax Ltd., India
 D-13 MIDC, R.D. Aga Road,
 Chinchwad, Pune 411 019, India.
 Tel : +91-20-27475941
 Fax: +91-20-27475907
 Email : acdmktg@thermaxindia.com
 Website : www.thermaxindia.com

Thermax Inc., USA
 Tel: +1 - 248 - 468 - 0541
 Fax: +1 - 248 - 468 - 0546
 Email: ssshastri@thermax-usa.com
 www.thermax-usa.com

Thermax Europe Ltd., UK
 Tel: +44 - 1908 - 378914
 Fax: +44 - 1908 - 379487
 Email: dinesh@thermax-europe.com
 www.thermax-europe.com

Thermax (ZheJiang)
 Cooling & Heating Eng. Co. Ltd., Shanghai, China
 Tel: +86 - 21 - 64483996
 Fax: +86 - 21 - 64483997
 Email: vaishnav@thermax-china.com
 www.thermax-china.com

Thermax Ltd., Russia
 Tel: +7 (495) 434-30-41,
 Fax: +7 (495) 434-46-58
 Email: dinesh@thermax-moscow.ru

Thermax Ltd., UAE
 Tel: +971 - 4 - 8816481
 Fax: +971 - 4 - 8816039
 Email: shafi@thermaxme.com,
 navas@thermaxme.com

Thermax Ltd., Saudi Arabia
 Tel - +966 (3) 8494111 # 5357,
 Fax: +966 (3) 8493707
 Email: shafi@thermaxme.com,
 navas@thermaxme.com

Thermax Ltd., Kenya
 Tel: +254 - 726 729812
 Fax: +254 - 20 - 4451919
 Email: nawzar@yahoo.com,
 amoholkar@thermaxindia.com

Thermax Ltd., Nigeria
 Tel: +254 - 726 729812
 Fax: +254 - 20 - 4451919
 Email: nawzar@yahoo.com,
 amoholkar@thermaxindia.com

Thermax Ltd., Thailand
 Tel: +66 - 813 - 720099
 Email: ngupta.thermax@gmail.com,
 chirag.thermax@gmail.com

Thermax Ltd., Malaysia
 Tel: +60 - 3 - 2166 9801
 Fax: +60 - 3 - 2166 9802
 Email: ngupta.thermax@gmail.com,
 kaustubh.thermax@gmail.com


Thermax Ltd., Indonesia
 Tel: +62 8588 1431310
 Email: ngupta.thermax@gmail.com

Thermax Ltd., Philippines
 Tel: 00-91-95525 41861
 Email: ngupta.thermax@gmail.com,
 manoj.thermax@gmail.com

Thermax Ltd., Bangladesh
 Tel: +88 - 01 - 912008883
 Email: mvreddy@citech-bd.com

Thermax Ltd., Sri Lanka
 Tel: +91 20 6612 2278
 Email: skhot@thermaxindia.com

Global Quality Standards

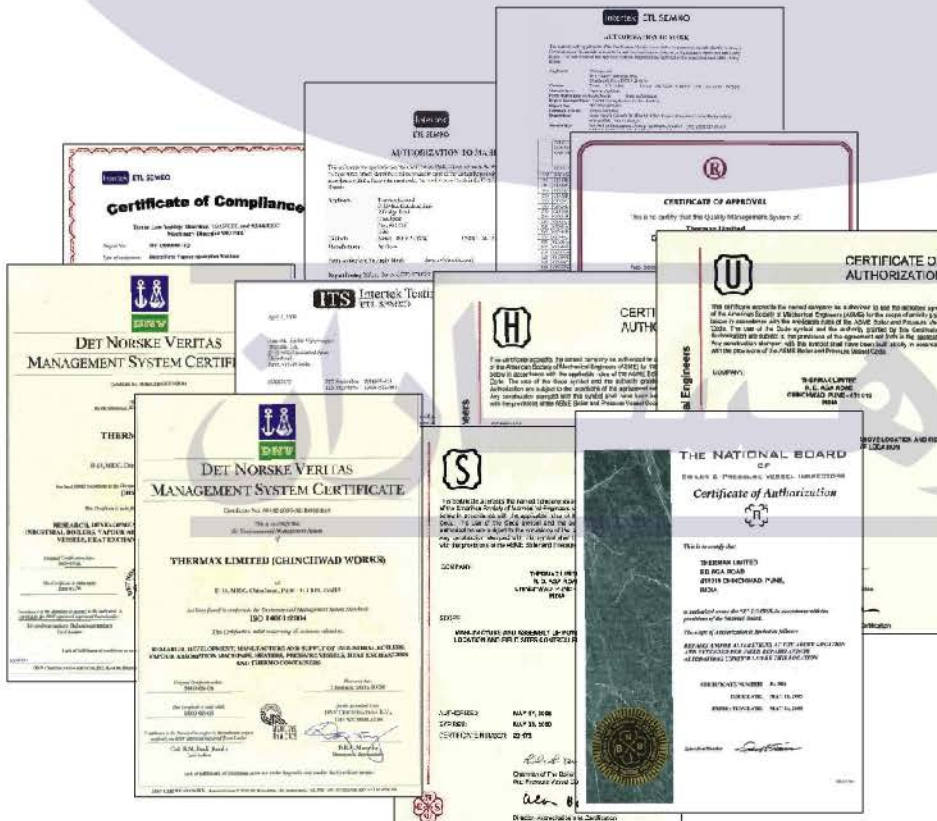

Thermax Business Portfolio

- Absorption Cooling
- Air Pollution Control
- Boilers & Heaters
- Captive Power
- Chemicals
- Water & Waste Solutions



Cooling & Heating Division



آدرس دفتر مرکزی: تهران، خیابان ملاصدر، خیابان شیراز جنوبی، خیابان فلاحی، پلاک ۲، واحد ۸، کد پستی: ۱۴۳۵۸۱۳۸۳۹

فکس: ۸۸۶.۱۹۷۲

تلفن: ۵-۸۸۶.۱۹۷۳ و ۳۰-۸۸۲۱.۲۲۹

پست الکترونیکی: Thermax@koosaran.com